



GLOBALSYNTH

GLOBALSYNTH LUBRICANTS PVT LTD


An ISO 9001 : 2015 CERTIFIED COMPANY

*Globalsynth
Rubber Process Oils*



Industrial Lubricant technology expert

CIN - U23209DL2021PTC382265

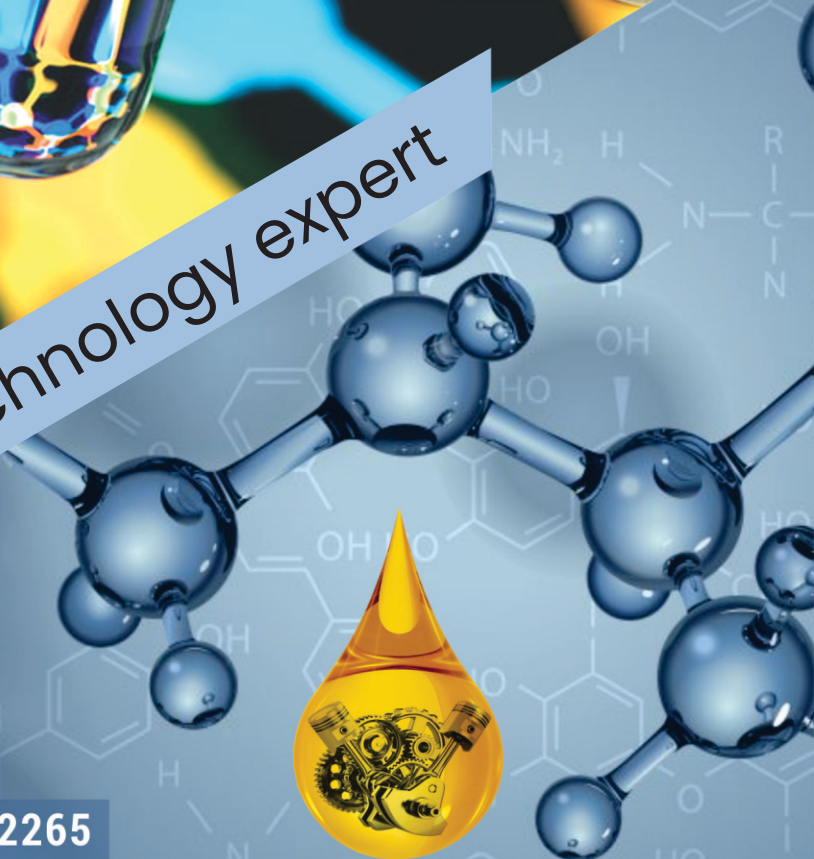

Globalsynth Rubber Process Oils

CHARACTERISTICS	NAPTHENIC	PARAFFINIC	AROMATIC
COLOUR,ASTM.(MAX)	3.0	3.0 Max	Dark Green
DENSITY @ 29.5 °C.gm/ml	0.8900	0.8800	0.9900
KINEMATIC VISCOSITY @ 40 °C, cSt.	20 to 22	30 to 32	20 to 30
FLASH POINT COC, °C.(MIN)	160	200 Min	200 Min
POUR POINT, °C.	-6	0	30
ANILINE POINT, °C.	78	98C – 105C	45C – 50C
NEUTRALISATION NUMBER mg KOH/gm of oil. (max.)	0.05	0.05	0.10
V.G.C. (VISCOSITY GRAVITY CONSTANT)	0.8600	0.8200	0.9350
CARBON TYPE ANALYSIS.			
CP	50	60	-----
CN	35	30	-----
CA	15	10	-----
MOLECULAR ANALYSIS :			
AROMATICS WT. %	-----	-----	75
POLAR COMPOUNDS WT. %	-----	-----	13
SATURATES WT. %	-----	-----	12





GLOBALSYNTH
GLOBALSYNTH LUBRICANTS PVT LTD

Registered Office :

F-23/1, G/F Gali No. 23, Krishna Nagar,
Near. Rastogi Community Hall, Delhi,
East Delhi - 110 051.

Corporate Office :

514, 5th Floor, SAKAR EAST COMPLEX, Opp. Bansal Mall,
B/S. Shilp Residency, Soma Talav, Tarsali,
40Mtr. Ring Road, Tarsali, Vadodara - 390 009.

+91 84488 57372 | 84488 37372

www. globalsynth.in

globalsynths@gmail.com | info@globalsynth.in
customercare@globalsynth.in

Our Dealer :